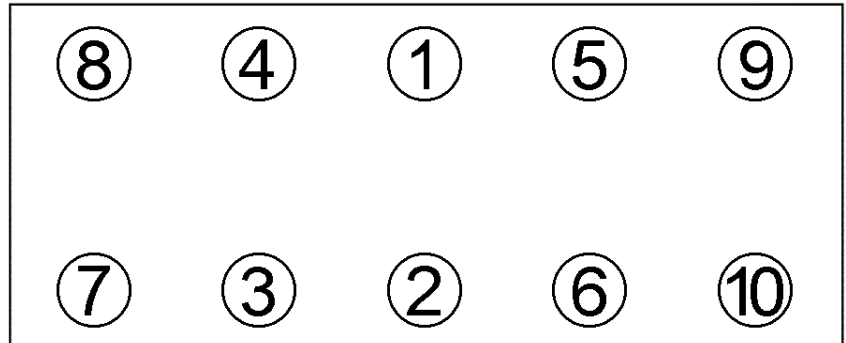


Anziehvorschrift Zylinderkopf**Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****075.890**passend für / suitable for
adaptable à / adaptable a**Citroën, Peugeot****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo267.551
M 12x1,5x121Anziehen/
Tightening/
Serrage/
Apriete 20 Nm
60 Nm
➤ 220°**Zeichenerklärung / Explanations / Explication / Explicacion**

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
*	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

÷ 1,65 mm, Ø 86 mm

Mot.: DW10 TD/UTD/ATED/BTED, RHS, RHV, RHX, RHZ

2,0 Ltr. HDi Diesel

Berlingo, C5, Evasion, Jumper, Jumpy, Xantia, Xsa

Scudo, Ulysse, Zeta, 206, 306, 307, 406, 407, 607

Expert, Partner, Grand Vitara

Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/10/09

075.890